

# TRADE ENGINEERING

*Solutions for Success*



*RIVOLTA S.L.X. TOP*



The high- performance electro- cleaner.



## Description

### S.L.X. Top: High- performance electro- cleaner

The electro cleaner with high cleaning power for the efficient cleaning of electrical equipment and components such as e.g. electrical switch stations, sweat transformers and generators, E- motors etc.

### Key benefits of S.L.X. Top

- High cleaning power
- Mean rapid, residue-free evaporation
- Practically free of aroma
- Various fields of application
- Dielectric strength 100,000 Volt/ em
- Also available as aerosol



## Rivolta S.L.X. Top High performance cleaner for electrical equipment

Rivolta S.L.X. Top a high performance cleaner for all electrical installations, parts and equipment based on pure basic materials, it evaporates without any residues and almost odorless.

### Applications

- Can be used to remove very quickly all kinds of oil, grease, dust and other resistant contaminations which cause the loss and breakdown of currents
- Can be used for cleaning of all kinds of electrical installations and equipment such as generators, transformers, rectifiers, electric engines, electrical switchgears and devices, electrical equipment for vehicles and hoisting equipment, insulators, contact rails, electronic parts, printed boards, potentiometers, time switchers, filters in air-conditioning systems etc.

Technical Data	Unit of measurement	Norm	S.L.X. Top
Density 20 °C	g/ml	DIN 51757	0,76
Flash point	°C	DIN EN ISO 2719	>+61
Evaporation rate	ETHER = 1	DIN 53170	60
Dielectric strength	V/cm	DIN 57370	100,00
Color	-	-	Colouless
Odor	-	-	Odorless

Packing in 400ml spray can 10L, can 30L, can 60L, drum 200L

### Product Strength

- Based on pure basic materials which are nontoxic and thus does not create any risks for the workers' health
- Evaporate without residues and almost odorless
- Able to clean all electrical installations And equipment without dismantling
- Insoluble in water and thus separate quickly from water and does not create stable emulsions

### Processing

Can be used for many cleaning procedures  
Like immersion, washing, brushing or spraying.  
Can also be applied with an airless or an electric  
Spray gun with a needle-jet nozzle.  
Can be applied by using B&L 500ml hands  
prayer.



## Property

Rivolta S.L.X. Top is a high performance cleaner for electric and electronic installations, components and devices. Especially economical, because no dismantling is necessary. Thus it saves labour, time and costs in a considerable scope.

Dielectric strength of 100,000 volt/cm. Medium fast evaporation without residues. Does not leave any residues. Flash point  $>+61^{\circ}\text{C}$ . Compatible with metals as well as materials which are resistant to solvents, e.g. paints, plastics and elastomers. Shelf life unlimited. Free of halogenated hydrocarbons (CHC and CFC).

The high dielectric strength of S.L.X. Top allows a safe cleaning of electrical switch gears and devices without dismantling. Thus cleaning operations which lasted several hours before can now be finished in several minutes. In most cases the obtainable cost savings amount to 70% and more!

Thanks to the intensive cleaning effect oily and greasy contaminations, dust deposits of all kinds, other contaminations and foreign substances, which may lead to current loss and disturbances, are removed.


<b>Form</b>	liquid
<b>Colour</b>	transparent
<b>Odour</b>	neutral

## Fields of application

Rivolta S.L.X. Top is in general used for the cleaning of all electric and electronic installations and devices such as e.g.: generators, transformers, rectifiers, electric motors, electrical switch gears and devices, electrical equipment for vehicles and machines, installations and devices of the radio and television engineering, insulators and contact rails, electronic components, printed circuit boards, potentiometers, counters, time switches, etc.

## Instructions for use

Easy application by spraying with a thin stream. The best results are achieved in most cases when S.L.X. Top is processed by an airless, electric spray gun with a fitted needle jet nozzle. For bigger installations the use of an airless high pressure cleaning device is recommended. As the product is odourless a pleasant processing is realized. Before the cleaning of collector motors it is advisable to change damaged carbons.

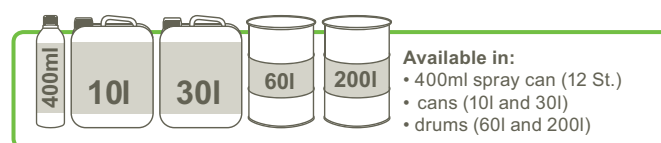

	Value	Norm
<b>NSF Reg.-No.</b>	137308/ 137307 (Spray)	-
<b>Evaporation</b>	without residues	-
<b>Evaporation rate</b>	60	DIN 53170
<b>Flash point</b>	$> +60^{\circ}\text{C}$	DIN EN ISO 2719
<b>Dielectric strength</b>	100,000 Volt/cm	-

# TRADE ENGINEERING

*Solutions for Success*



10 Str. OHRID - DIMITROVGRAD  
P.O. BOX: 6400, BULGARIA  
TELEPHONE: +359 896 49 63 05  
INFO@TRADEENGINEERING.COM  
WWW.TRADEENGINEERING.COM